


VSH Tectite

Ballofix isolating ball valve - straight pattern. Tectite push-fit ends for copper tube, plastic handle

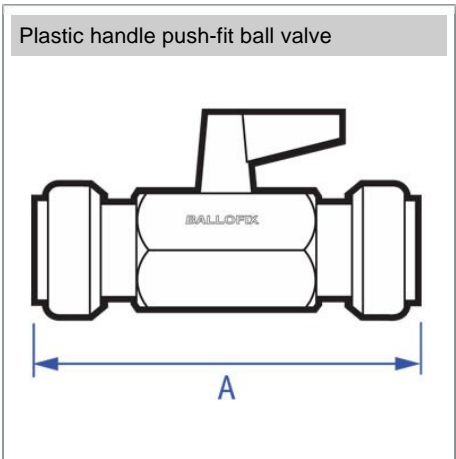

General Information

Size	Pattern No.	Pack 1 Qty	Pack 2 Qty	Code	Barcode	Price (£) each ex VAT	Discontinued	Date Discontinued
15mm	6381ZP	1	5	<u>13081</u>	5708537315981	Disc(Stock available)	Discontinued	17/09/2021

Dimensions

Code Description A

Pegler Yorkshire reserve the right to change specifications

Materials

Component	Material
Body	DZR brass, chrome plated
Ball	DZR brass, nickel plated
'O' rings	EPDM
Handle	Nylon PA6.6 (30% glass reinforced)
Compression nut	Forged brass, chrome plated
Compression cone	Brass

Technical Suitability

Steam	Water	Oil	Air	Gas	Inert Gas	Combustible†	Gas Corrosive††	Gas Oxygen
no	yes	no	no	no	no	no	no	no

Pegler Yorkshire reserve the right to change specifications

Gas application guide

Class 1. INERT Air, argon, carbon dioxide, helium, nitrogen
 Class 2. COMBUSTIBLE Hydrogen, methane, natural gas, town gas
 Class 3. CORROSIVE Chlorine, sulphur dioxide Class 4. OXYGEN

Class 1. INERT Air, argon, carbon dioxide, helium, nitrogen

† Valves are suitable for British Gas Applications Family Gases 1, 2 and 3.

†† Suitable in applications where moisture is completely absent.

