SANIPEXGROUP

AQUAECO CONCEALED SELF-CLOSING PUSH TAP CP

AQE-ECO-512100-A-CP








\sim				
Spe	コーコナ	∩atı	\cap r	10
OD	ラレロロ	Cai	IOI.	10

Brand	AQUAECO
Range	AQUAECO
Product code	AQE-ECO-512100-A-CP
Finish/Colour	CHROME
Product type	TAP
Material	BRASS
Connection Size	1/2"
Test Range	0.2-5 Bar
Min. Operating Pressure	2.0 BAR HP

Technical Information

SELF-CLOSING PUSH TAP
WALL MOUNTED CONCEALED
FLOW TIME: 12 SECONDS (+/- 3 SEC) (FIXED)
OPERATING PRESSURE - MIN 1 BAR - MAX 5 BAR
RECOMMENDED PRESSURE 2-4 BAR
RECOMMENDED WATER TEMPERATURE 5-65°C
RECOMMENDED FOR USE WITH THERMOSTATIC-
MIXER VALVE: AQM-WRM-T301-CON-CP

Flow Rate Graph

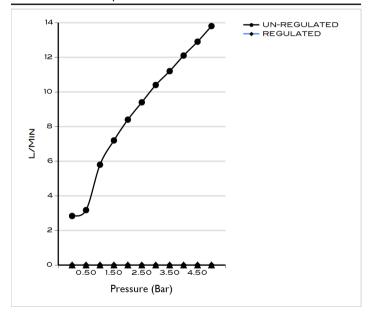

Box contents: PUSH TAP

Drawing

